


CAPTIONS (H" x W")

| TIME | 6" x 18" |
|---------|----------|
| HOME | 6" x 20" |
| VISITOR | 6" x 29" |
| INNING | 6" x 24" |
| BALL | 6" x 18" |
| STRIKE | 6" x 25" |
| OUT | 6" x 14" |
| AT BALL | 6" x 27" |
| Н | 6" x 7" |
| F | 6" x 7" |

DIGIT SIZES (H")

| AT BAT SPOT | 15" |
|-----------------|------|
| BALL | 15" |
| INNING | 15" |
| OUT | 15" |
| STRIKE | 15" |
| TEAM SCORES | 15" |
| H/E SPOT | 3.5" |
| POSSESSION SPOT | 3.5" |
| MINUTES SPOT | 3.5" |
| SECONDS SPOT | 3.5" |

MODEL: BA-7209MP-2

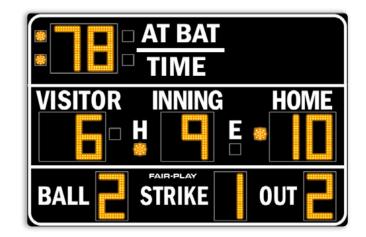

| DIMENSIONS | Height | Length | Depth | Weight | |
|------------|--------|--------|-------|----------|--|
| | 6'-0" | 9'-0" | 10" | 288 lbs. | |

STANDARD EQUIPMENT

- Super-bright, wide-angle amber LED's
- 4-level control console display brightness adjustment
- 5-year limited warranty
- Easy access built-in service points
- Quality engineered water resistant aluminum
- Complete, secure and durable display mounting
- Built-in lightning suppressor (for standard data direct wire only)
- Request a free project design renderings
- Help Desk Support
- USA Factory authorized national and local sales, service and installation

OPTIONAL EQUIPMENT

- Full-color electronic message displays
- Integrated scoring and display systems
- Illuminated, non-illuminated identification and sponsorship signage
- · Personalized vinyl home team name
- Scoreboard caption color (other than white)
- · Custom, unique signage options
- · Scoreboard control carrying case
- Truss and decorative steel systems
- Power lighting protector

Please see Color Chart PDF for all scoreboard color options.

UV resistant custom paint & vinyl trim colors available.

ELECTRICAL

| OPERATING TEMPERATURES |
|------------------------|
| |

| Voltage | Hertz | Watts | AMPS | Phase | Wiring | Required | Listing | Scoreboard Display | | Control Console | |
|---------|-------|-------|------|-------|-----------------|----------|----------|--------------------|---------------|-----------------|-------------|
| 120 VAC | 60 | 145 | 2 | 1 | 2-Wire + ground | 1 | ETL/CETL | -22° to 131° F | -30° to 55° C | 32° to 131° F | 0° to 55° C |
| | | | | | | | | | | | |

All weights and measures are approximate. To confirm specifications please contact your local Fair-Play representative.

For applicable models, consult with a sales representative on the following:

- Choice of Fair-Play's scorekeeper approved score systems
- Electronic Team Names
- Rear-illuminated scoreboard captions or scoreboard sport-conversion captions (electronic)
- Changeable scoreboard game captions electronic available, operated via control
- Pitch Speed or Pitch Count Display Systems