




| HOME        | 9" x 35"  |
|-------------|-----------|
| VISITOR     | 9" x 47"  |
| INNING      | 9" x 44"  |
| BALL        | 9" x 32"  |
| STRIKE      | 9" x 43"  |
| OUT         | 9" x 25"  |
| R, H, E     | 9" x 19"  |
| PITCH COUNT | 18" x 31" |

FAIR-PLAY

## DIGIT SIZES (H")

| TEAM SCORES | 18"  |
|-------------|------|
| INNING      | 18"  |
| PITCH COUNT | 15"  |
| BALL SPOT   | 3.5" |
| H/E SPOT    | 3.5" |
| OUT SPOT    | 3.5" |
| STRIKE SPOT | 3.5" |

## MODEL: BA-7100PC

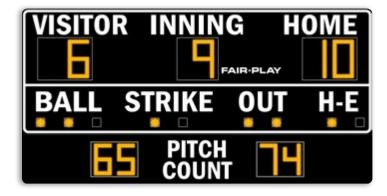

| DIMENSIONS | Height | Length | Depth | Weight   |
|------------|--------|--------|-------|----------|
|            | 7'-0"  | 14'-0" | 10"   | 449 lbs. |

#### STANDARD EQUIPMENT

- Super-bright, wide-angle amber LED's
- 4-level control console display brightness adjustment
- 5-year limited warranty
- Easy access built-in service points
- Quality engineered water resistant aluminum
- Complete, secure and durable display mounting
- Built-in lightning suppressor (for standard data direct wire only)
- Request a free project design rendering
- Help Desk Support
- USA Factory authorized national and local sales, service and installation

### **OPTIONAL EQUIPMENT**

- Full-color electronic message displays
- Integrated scoring and display systems
- Illuminated, non-illuminated identification and sponsorship signage
- Personalized vinyl home team name
- Scoreboard caption color (other than white)
- Custom, unique signage options
- Scoreboard control carrying case
- Truss and decorative steel systems
- Power lightning protector

**OPERATING TEMPERATURES** 

# Please see Color Chart PDF for all scoreboard color options. UV resistant custom paint &

vinyl trim colors available.

## **ELECTRICAL**

| Voltage | Hertz | Watts | AMPS | Phase | Wiring          | Circuits<br>Required |          |
|---------|-------|-------|------|-------|-----------------|----------------------|----------|
| 120 VAC | 60    | 155   | 2    | 1     | 2-Wire + ground | 1                    | ETL/CETL |

| Scoreboard Disp    | lay           | Control Console |             |  |
|--------------------|---------------|-----------------|-------------|--|
| <br>-22° to 131° F | -30° to 55° C | 32° to 131° F   | 0° to 55° C |  |

All weights and measures are approximate. To confirm specifications please contact your local Fair-Play representative.

## For applicable models, consult with a sales representative on the following:

- Choice of Fair-Play's scorekeeper approved score systems
- Electronic Team Names
- Rear-illuminated scoreboard captions or scoreboard sport-conversion captions (electronic)
- Changeable scoreboard game captions electronic available, operated via control
- Pitch Speed or Pitch Count Display Systems